






SERIES	CAVITY	DESCRIPTION	FLOW LPM/GPM	PRESSURE BAR/PSI	PAGE NO.
Technical Tips					LE2-LE7
					
POPPET TYPE					
LE101A (NEW)	C10-3S	Normally Closed, Pilot to Close	57/15	350/5000	LE8
16SLC1-A	C16-3S	Normally Closed, Pilot to Close	189/50	240/3500	LE9
20SLC1-A	C20-3S	Normally Closed, Pilot to Close	303/80	240/3500	LE10
					
SPOOL TYPE					
LE102A (NEW)	C10-3S	Normally Closed, Pilot to Close	57/15	350/5000	LE11
R06E3	C16-3S	Normally Closed, Pilot to Close	400/106	420/6000	LE12
R08E3	C20-3S	Normally Closed, Pilot to Close	500/132	420/6000	LE13
					
LE102B (NEW)	C10-3S	Normally Closed, Vent to Open	57/15	350/5000	LE14
					
LE103A (NEW)	C10-3S	Normally Open, Vent to Close	57/15	350/5000	LE15
R06H3	C16-3S	Normally Open, Vent to Close	160/42	420/6000	LE16
					
LE103B (NEW)	C10-3S	Normally Open, Vent to Close	57/15	350/5000	LE17

CV
Check Valves
SH
Shuttle Valves
LM
Load/Motor Controls
FC
Flow Controls
PC
Pressure Controls
LE
Logic Elements
DC
Directional Controls
SV
Solenoid Valves
PV
Proportional Valves
CE
Coils & Electronics
BC
Bodies & Cavities
TD
Technical Data


INTRODUCTION:

Parker's logic valves offer system designers a versatile range of screw-in elements that, when used in the proper combinations, can provide flexible design solutions for many common cartridge valve applications. They offer system designers the advantage of applying cartridge valve technology in applications where the flow and pressure conditions may exceed the limits of typical cartridge valves. Logic valves are essentially high flow poppet or spool elements that are controlled by small pilot devices. They can be used to control flow, pressure, or direction, and when applied in the proper arrangements, can perform multi-task control functions. Parker's logic valves offer system designers alternative products that can help reduce the size, cost, and complexity of integrated manifold systems.



NEW PRODUCTS:

Parker Logic Valves are offered in two basic categories: Poppet and Spool.

Poppet Type - Used for flow switching directional control applications.

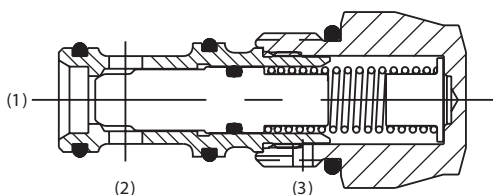

Spool Type - Used for pressure sensing in modulating applications to regulate flow and pressure.

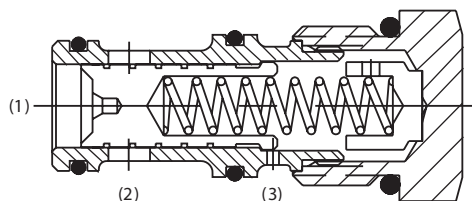

**PRODUCT TYPES / APPLICATIONS**
POPPET TYPE

Poppet type logic valves are 3 ported, 2-way on/off valves that switch flow between port 1 and port 2. The poppet's on/off action is operated by controlling pilot oil at port 3 of the valve. A small low flow solenoid or pilot valve is an ideal control for this purpose. Parker offers vent-to-open and pilot-to-close style poppet logic valves.

Note: Poppet logic valves are an unbalanced 2:1 ratio poppet design. The opening and closing of the poppet is dependent on the force balances on the areas of the poppet at port 1, port 2, and port 3.

Vent-to-open logic valves:

Vent-to-open logic valves are primarily used for uni-directional switching applications. The poppet in the vent-to-open logic valve is spring biased to the closed condition. The pilot oil source that operates the logic element is generated internally by direct pressure from either work port 1 or 2, depending on the option chosen. Venting the pilot oil at port 3 allows the valve to open and pass flow between port 1 and 2 at the bias spring setting. Blocking the pilot at port 3 causes the valve to close. When closed, the 2:1 ratio poppet design provides a positive low leak seal. Because the pilot source is generated internally within the valve, vent-to-open logic valves are best suited for uni-directional applications.




Technical Tips

POPPET TYPE *Continued*

Pilot-to-close logic valve:

Pilot-to-close logic elements are primarily used for bi-directional flow switching applications. The poppet in the pilot-to-close logic valve is spring biased to the closed condition. With no pilot signal at port 3, the valve will open allowing flow in either direction between work ports 1 and 2 once pressure at one of the work ports reaches the biased spring setting. Applying a sufficient externally generated pilot force to port 3 of the valve closes the poppet creating a low leak seal between port 1 and port 2.



Pilot-to-close

External pilot required
Bi-directional flow, port 1 to 2.

Logic Elements

2-way, 3-way, and 4-way Directional Control:

Poppet logic valves are typically used to perform high flow directional switching operations using small low power pilot valves to control the sequence of the directional operation.

- A single logic valve can be used to control 2-way, on/off switching.
- Multiple elements in a bridge arrangement can control 3-way or 4-way directional switching.
- Since each logic valve is individually controlled, the timing, sequence, and overlap of directional functions can be controlled very precisely.
- Uni-directional or bi-directional flow can be achieved, depending on the valve selected.
- Flows in excess of 80 gpm can be controlled through a single logic element, and more than one logic valve can be used in parallel to control flow in excess of the rated flow of a single element.
- Poppet construction provides a low leak directional control.

(See circuit examples on pages LE5-LE6)

SPOOL TYPE


Spool type logic valves can also be used for directional switching, however, they are typically used in modulating applications to control flow or regulate pressure. Virtually any pressure or flow control function can be achieved with a spool type logic valve including; restrictive or priority flow control, pressure relief, pressure reducing, sequencing, and unloading.

The spools in this category of logic valves are balanced designs; the spool area at the work port (port 1) and the pilot port (port 3) are equal (1:1). The spool is held in a biased condition by a spring. Venting the pilot at port 3 creates an unbalanced condition causing the valve spool to modulate open or close, depending on the valve chosen. This spool design makes the valve vary stable because the forces acting to open and close the valve are in balance.


Flow Control / Compensators:

Parker offers two types of logic valves for flow control functions.

- 1) Normally open spools function as a restrictive type compensator.
- 2) Normally closed spools function as a priority or by-pass compensator.



Normally open spool




Normally closed spool

Technical Tips

Restrictive Flow Regulator:


Normally open spool type logic elements can be used with an external orifice or valve as a compensator to regulate flow. Used as restrictive compensator, a normally open spool senses the upstream and downstream pressure across an orifice or valve. The spool modulates closed to maintain a constant pressure drop across the controlled device equal to the bias spring in the logic valve, thus maintaining a constant flow rate regardless of changes in upstream or downstream pressure.

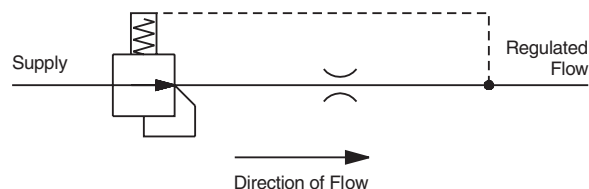

Logic Elements


Priority / Bypass Flow Regulator:

A logic valve with a normally closed spool can be used as a priority or by-pass compensator. In this case, the spool modulates open to maintain a constant pressure drop across the controlled orifice or valve, thereby maintaining a constant priority flow regardless of upstream or downstream pressure changes. In a priority arrangement, any oil that doesn't saturate the controlled device is by-passed at load pressure plus the value of the bias spring in the logic valve.

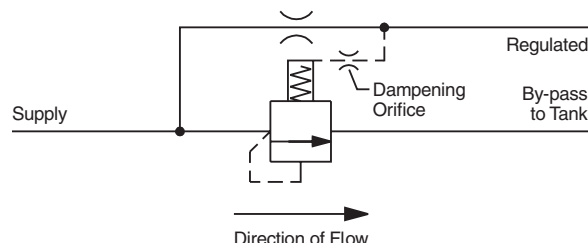

Pressure Control:

Spool type logic valves can be used as the main stage spool in high flow pressure control applications with the logic valve handling the high flow, and a small pilot valve controlling the action of the logic valve spool. Normally open, and normally closed spool options are available enabling virtually all pressure control functions to be achieved. When used in pressure control applications, the logic valve spool modulates open or closed to maintain the pressure setting of the pilot valve communicated to port 3. Pressure control applications require a pilot connection between the control port (port 1 or 2), and the pilot port (port 3). In order to simplify the design, Parker offers spool type logic valves with internal piloting options that can help minimize the number of connections needed. When used in manifold systems, the internal piloting options help to simplify the manifold design by reducing the number of construction drillings in the block. Multiple functions such as relief, pump unloading, and pressure compensation can be performed with one logic valve by communicating multiple pilot devices to the same logic element.

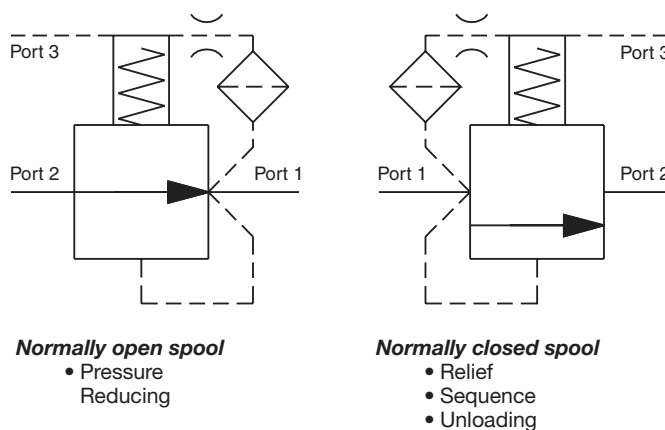

(See circuit examples on page LE7)

Application Note:


This section is as an application guide, and it is intended to illustrate the various ways that logic elements can be used to create a variety of hydraulic control functions. For additional help applying logic valves, contact your Parker Sales Engineer.

CV	Check Valves
SH	Shuttle Valves
LM	Load/Motor Controls
FC	Flow Controls
PC	Pressure Controls
LE	Logic Elements
DC	Directional Controls
SV	Solenoid Valves
PV	Proportional Valves
CE	Coils & Electronics
BC	Bodies & Cavities
TD	Technical Data

DIRECTIONAL CONTROL EXAMPLES

**2-position, 2-way
normally open example.**


Switched by 2-position, 3-way pilot valve and external pilot pressure.

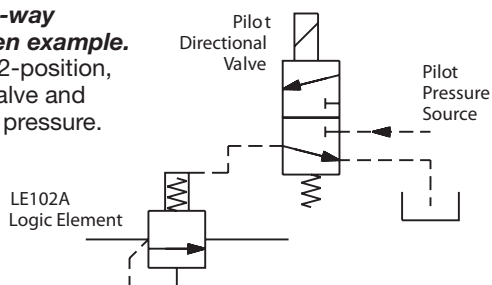

Direction of Flow

**2-position, 2-way
normally open example.**


Switched by external pilot pressure and vented through 2-position, 2-way pilot valve.

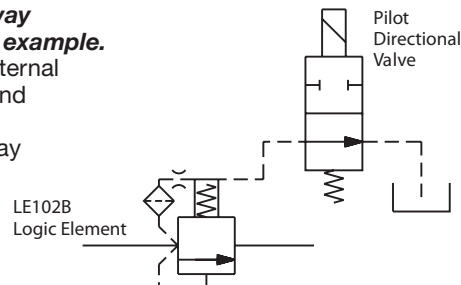

Direction of Flow

**2-position, 2-way
normally open example.**


Internal pilot generation.

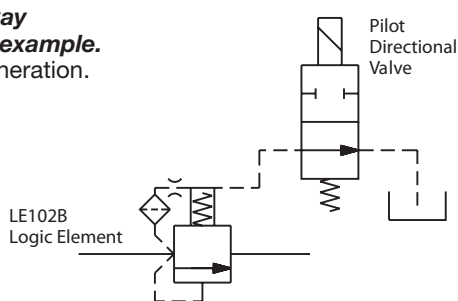

Direction of Flow

**2-position, 2-way
normally open example.**


Internal pilot generation.

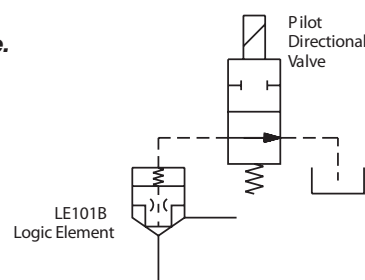

Direction of Flow

**2-position, 2-way
normally open example.**


Switched by 2-position, 3-way pilot valve and external pilot.

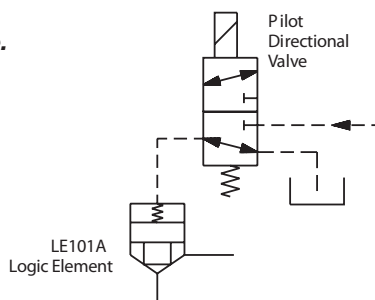

Direction of Flow

****SLC1A logic element.**


With shuttle-selected pilot supply.

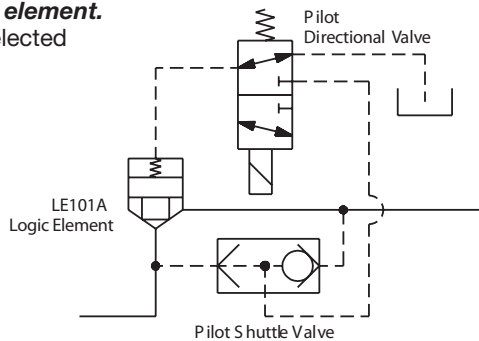

Direction of Flow

****SLC1A logic element.**

External pilot supply and 2-position, 2-way pilot directional valve.

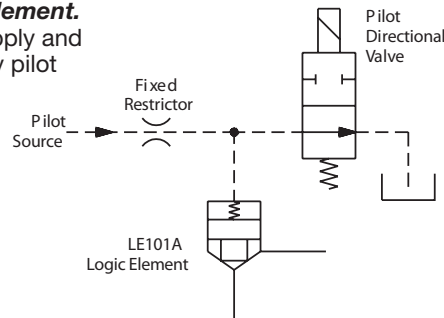

Direction of Flow

CV

Check
Valves

SH

Shuttle
Valves

LM

Load/Motor
Controls

FC

Flow
Controls

PC

Pressure
Controls

LE

Logic
Elements

DC

Directional
Controls

SV

Solenoid
Valves

PV

Proportional
Valves

CE

Coils &
Electronics

BC

Bodies &
Cavities


TD

Technical
Data


DIRECTIONAL CONTROL EXAMPLES

THREE-WAY BRIDGE CIRCUITS


Circuit 1, with LE101A poppet logic element.



Circuit 2, with LE102A spool logic element.



Circuit 3, with LE102A spool logic element.




Required Flow Path	Pilot Pressure Applied To		Available From Circuit		
	PA	PB	1	2	3
	NO	NO	X	X	
	YES	NO	X	X	X

Required Flow Path	Pilot Pressure Applied To		Available From Circuit		
	PA	PB	1	2	3
	NO	YES	X	X	
	NO	YES	X		X


NOTE: Pilot pressure must exceed load pressure in order for valve to close.

FOUR-WAY BRIDGE CIRCUITS

Circuit 1, with LE101A poppet logic elements.

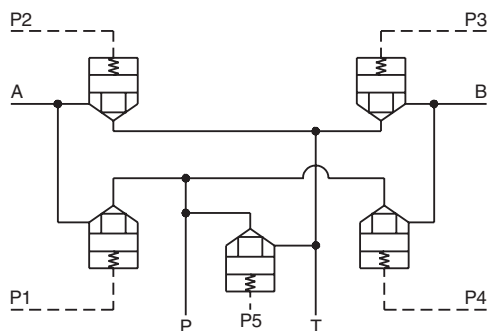

Circuit 2, with LE102A spool logic elements.

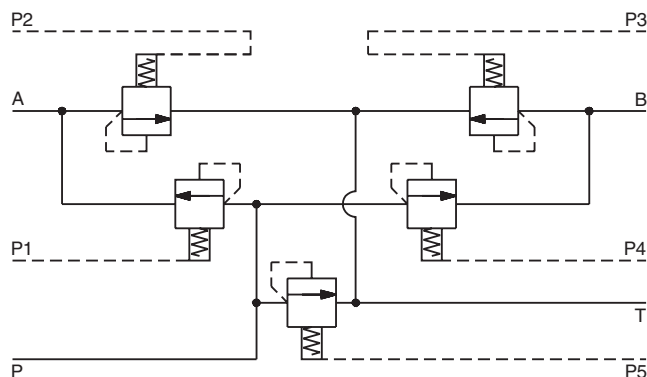


Required Flow Path	Pilot Pressure Applied To				
	P1	P2	P3	P4	P5
	YES	YES	YES	YES	YES
	NO	NO	NO	NO	NO
	YES	YES	NO	NO	NO
	NO	NO	YES	YES	NO
	YES	YES	YES	YES	NO

Required Flow Path	Pilot Pressure Applied To				
	P1	P2	P3	P4	P5
	YES	NO	NO	YES	YES
	NO	YES	YES	NO	YES
	YES	YES	NO	YES	YES
	NO	YES	YES	YES	YES
	NO	YES	NO	YES	YES


NOTE: Pilot pressure must exceed load pressure in order for valve to close.

FLOW CONTROL EXAMPLES


Pressure compensated priority flow control example.

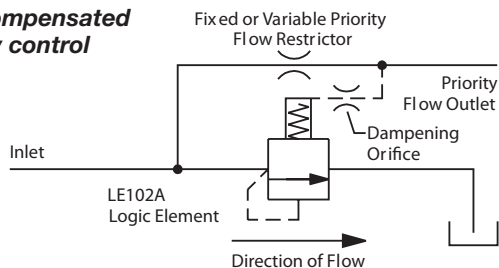


Load sensing priority flow control example with pressure limiting and unloading.

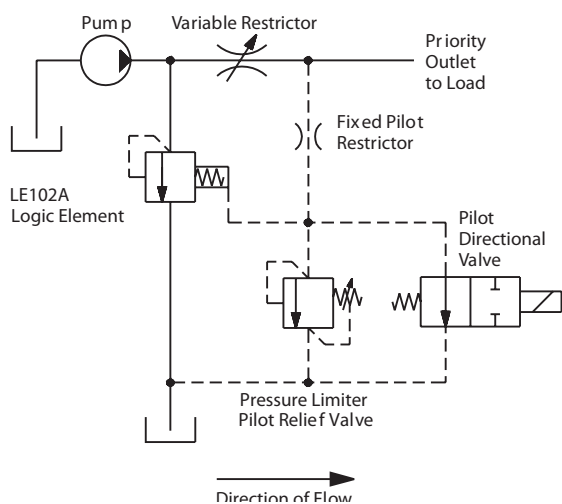

Pressure compensated restrictive flow control example.

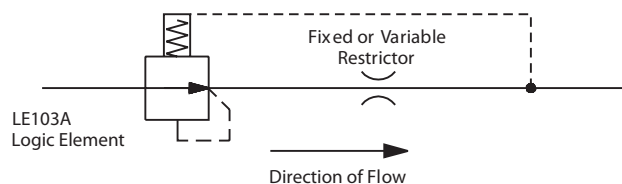


Load sensing priority flow control example with pressure limiter.

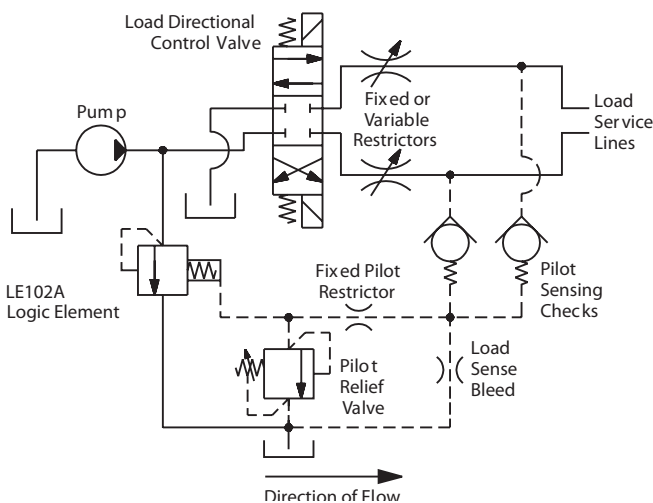


PRESSURE CONTROL EXAMPLES


Pressure relief or sequence example with external pilot supply and pilot relief.

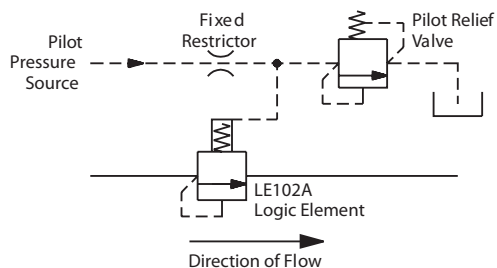


Pressure reducing example, non-relieving type.

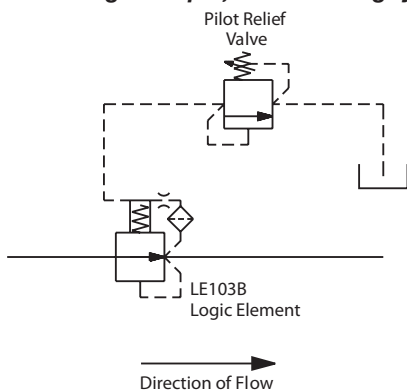

Pressure relief or sequence example with internal pilot supply and pilot relief.

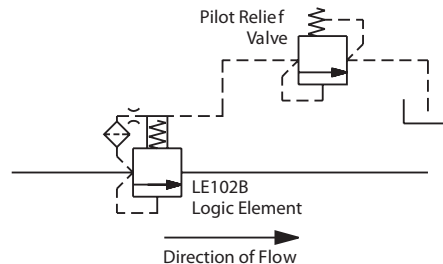

Pressure reducing-relieving example.

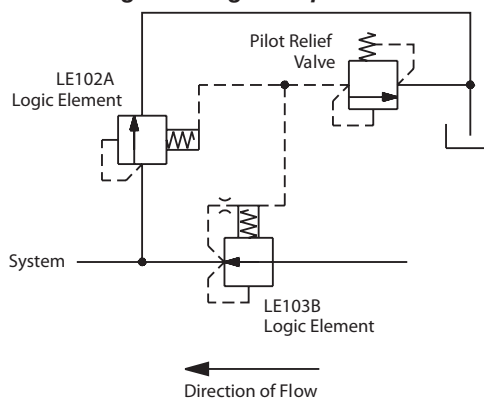

CV

Check
Valves

SH

Shuttle
Valves

LM

Load/Motor
Controls

FC

Flow
Controls

PC

Pressure
Controls

LE

Logic
Elements

DC

Directional
Controls

SV

Solenoid
Valves

PV

Proportional
Valves

CE

Coils &
Electronics

BC

Bodies &
Cavities

TD

Technical
Data

General Description

Poppet Type, Bi-Directional, Normally Closed, Pilot to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- Hardened, precision ground parts for durability
- Low leakage design
- All external parts zinc plated
- Port 2 to 1 is the preferred flow path
- "D"-Ring eliminates backup rings

Specifications

Rated Flow	57 LPM (15 GPM)
Maximum Inlet Pressure	350 Bar (5000 PSI)
Leakage at 150 SSU (32 cSt)	5 drops/min. (.33 cc/min.) @ 350 Bar (5000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +93°C ("D"-Ring) (-35°F to +200°F) -34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.14 kg (0.3 lbs.)
Cavity	C10-3S (See BC Section for more details)

Ordering Information

LE101A

10 Size
Logic Element





Bias
Spring

Highlighted **r** represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.


Code	Bias Spring
02	1.7 Bar (25 PSI)
04	3.5 Bar (50 PSI)
05	5.2 Bar (75 PSI)
07	6.9 Bar (100 PSI)
10	10.3 Bar (150 PSI)

Code	Seals
Omit	"D-Ring"

Kit	Part Number
D-Ring Seal	SK10-3S
Nitrile Seal	SK10-3S
Fluorocarbon Seal	SK10-3SV

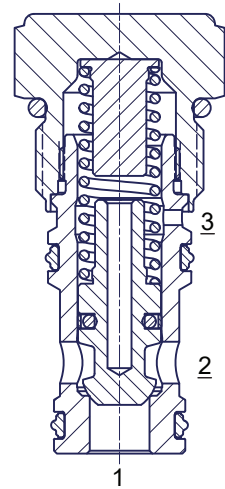


Dimensions

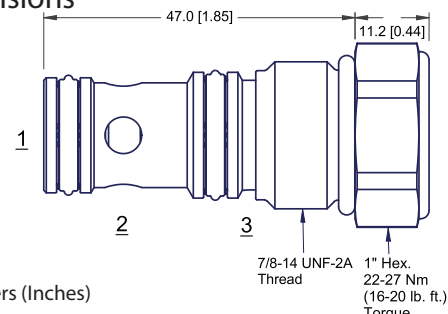


Millimeters (Inches)

Performance Curves

Pressure Drop, P2-P1 vs. Flow (Through cartridge only)
Hydraulic Oil 150 SSU @ 100F (32cSt)

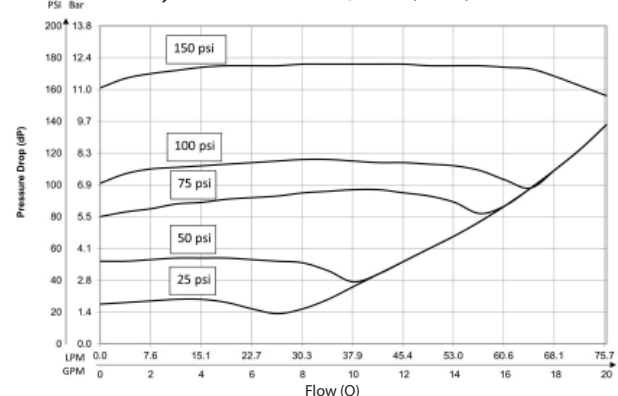

Pressure Drop, P1-P2 vs. Flow (Through cartridge only)
Hydraulic Oil 150 SSU @ 100F (32cSt)

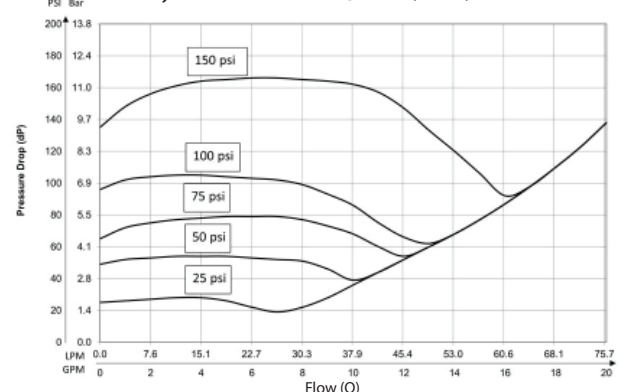

General Description


Poppet Type, Bi-Directional, Normally Closed, Pilot to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- Hardened, precision ground parts for durability
- Polyurethane seals only
- No backup rings
- Low leakage design
- All external parts zinc plated
- Port 2 to 1 is the preferred flow path



Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

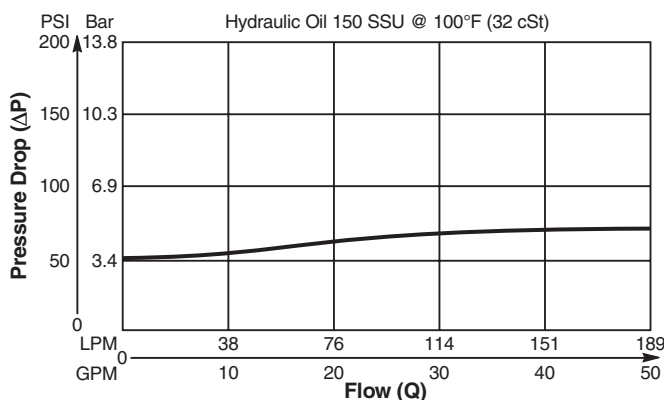


Specifications

Rated Flow	189 LPM (50 GPM)
Maximum Inlet Pressure	240 Bar (3500 PSI)
Leakage at 150 SSU (32 cSt)	5 drops/min. (.33 cc/min.) @ 240 Bar (3500 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +107°C (Polyurethane, EPS) (-35°F to +225°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.33 kg (0.78 lbs.)
Cavity	C16-3S (See BC Section for more details)

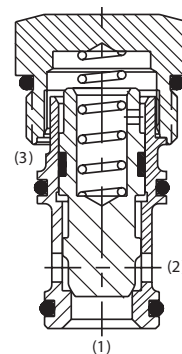

Dimensions

Millimeters (Inches)

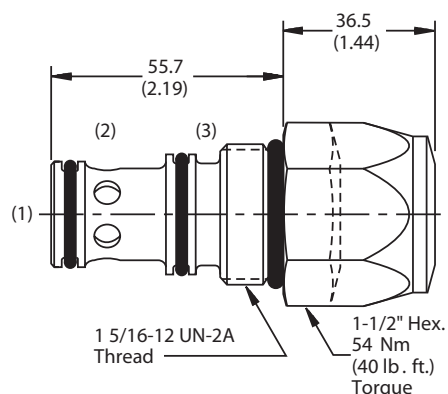

Ordering Information

16SLC1	-	A	-	
16 Size Logic Element		Poppet Bi-Directional		Bias Spring

Highlighted represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.

Code	Bias Spring
100	6.9 Bar (100 PSI)
150	10.3 Bar (150 PSI)

Code	Seals
Omit	Polyurethane, EPS

Kit	Part Number
Polyurethane, EPS Seal	WRK-16-3S
Fluorocarbon Seal	WRK-16-3S-W

General Description


Poppet Type, Bi-Directional, Normally Closed, Pilot to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- Hardened, precision ground parts for durability
- Polyurethane seals only
- No backup rings
- Low leakage design
- All external parts zinc plated
- Port 2 to 1 is the preferred flow path



Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

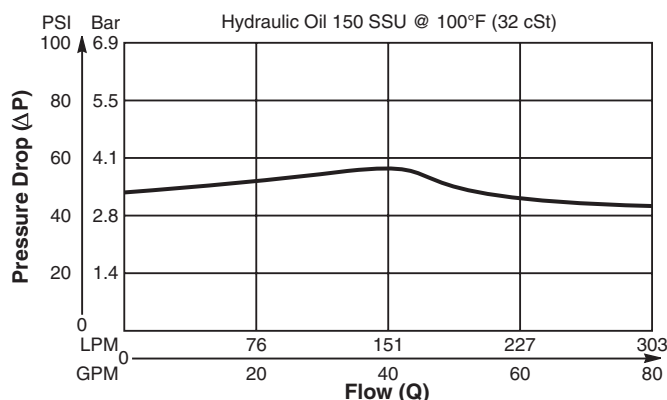


Specifications

Rated Flow	303 LPM (80 GPM)
Maximum Inlet Pressure	240 Bar (3500 PSI)
Leakage at 150 SSU (32 cSt)	5 drops/min. (.33 cc/min.) @ 240 Bar (3500 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +107°C (Polyurethane, EPS) (-35°F to +225°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.81 kg (1.78 lbs.)
Cavity	C20-3S (See BC Section for more details)



Dimensions

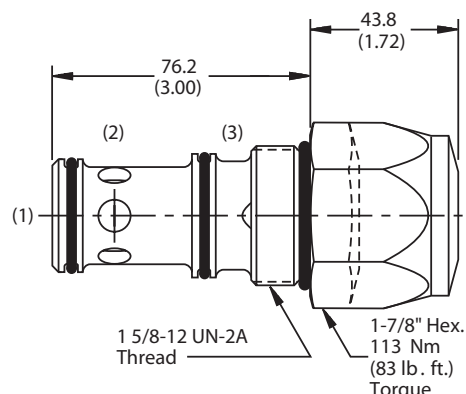

Ordering Information

20SLC1	-	A	-	
20 Size Logic Element		Poppet Bi-Directional		Bias Spring

Highlighted represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.

Code	Bias Spring
100	6.9 Bar (100 PSI)
150	10.3 Bar (150 PSI)

Code	Seals
Omit	Polyurethane, EPS

Kit	Part Number
Polyurethane, EPS Seal	WRK-20-3S
Fluorocarbon Seal	WRK-20-3S-W

General Description


Spool Type, Normally Closed, Pilot to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- High flow capacity
- Used as high flow switching or metering element
- Can be used as bleed off style pressure compensated flow regulator when used with restrictor
- Various bias spring pressures available
- 1:1 pilot pressure ratio
- Hardened working parts for maximum durability
- All external parts zinc plated
- “D”-Ring eliminates backup rings



Performance Curve

Pressure Drop, vs. Flow (Through cartridge only)
Hydraulic Oil 150 SSU @ 100F (32cSt)

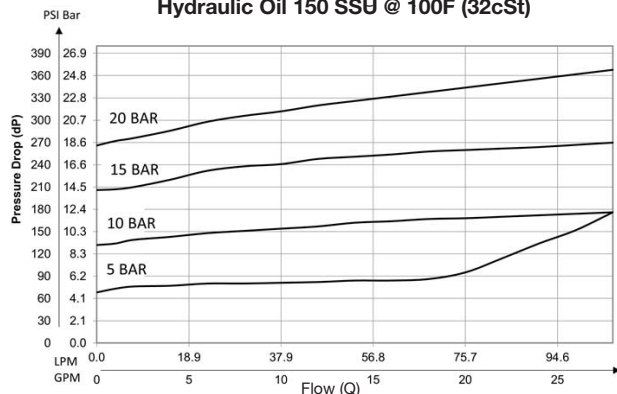


Specifications

Rated Flow	57 LPM (15 GPM)
Maximum Inlet Pressure	350 Bar (5000 PSI)
Leakage at 150 SSU (32 cSt)	82 ml/min.@207 Bar (3000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +93°C (“D”-Ring) (-35°F to +200°F) -34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.02 kg (0.045 lbs.)
Cavity	C10-3S (See BC Section for more details)

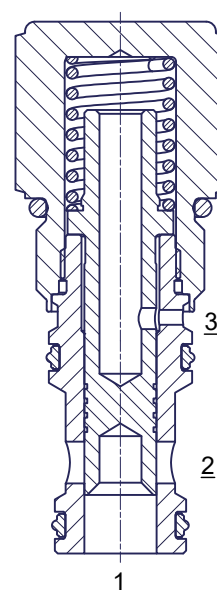

Dimensions

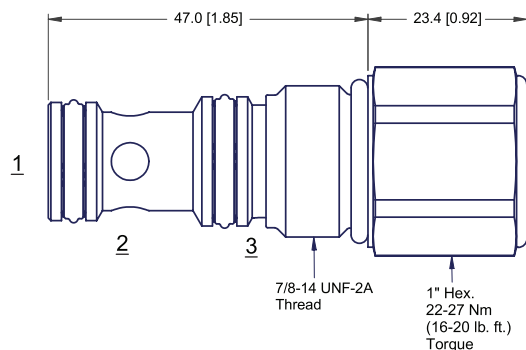

Ordering Information

LE102A

10 Size
Logic Element



Bias
Spring

Highlighted represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.

Code	Bias Spring
01	1.7 Bar (25 PSI)
05	3.5 Bar (50 PSI)
07	6.9 Bar (100 PSI)
10	10.3 Bar (150 PSI)
15	15 Bar (218 PSI)
20	20 Bar (290 PSI)

Code	Seals
Omit	“D-Ring”
Kit	
D-Ring Seal	SK10-3S
Nitrile Seal	SK10-3S
Fluorocarbon Seal	SK10-3SV


General Description

Spool Type, Normally Closed, Pilot to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features



- High flow capacity
- Used as high flow switching or metering element
- Can be used as bleed off style pressure compensated flow regulator when used with restrictor
- More stable than poppet type
- Various switching pressures available
- 1:1 pilot pressure ratio
- Hardened working parts for maximum durability
- All external parts zinc plated

Performance Curve (Through cartridge only) Vented Open Pressure Drop vs. Flow 1 to 2

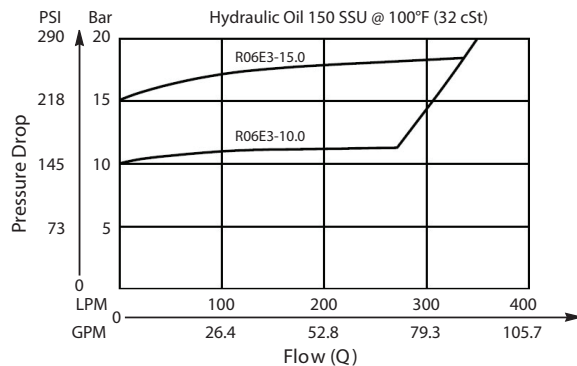


Specifications

Rated Flow	400 LPM (106 GPM)
Nominal Flow @ 7 Bar (100 PSI)	270 LPM (71 GPM)
Maximum Inlet Pressure	420 Bar (6000 PSI)
Leakage at 150 SSU (32 cSt)	82cc/min. (5 cu in/min.) @ 240 Bar (3000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.33 kg (0.78 lbs.)
Cavity	C16-3S (See BC Section for more details)

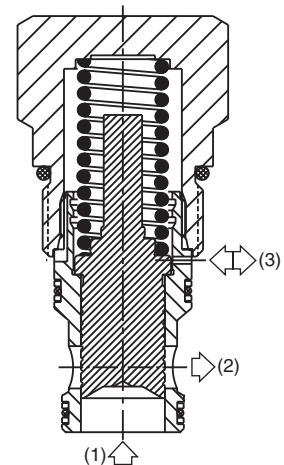

Dimensions

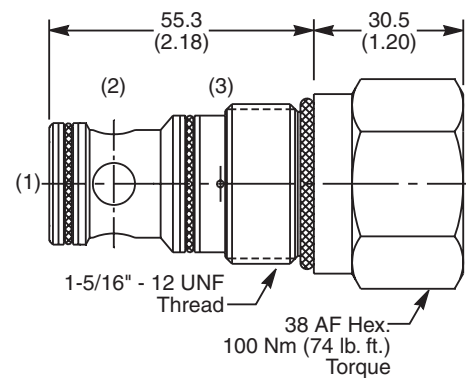

Ordering Information

R06E3		N
16 Size Logic Element	Switching Pressure	Seals

Code	Switching Pressure Non Adjustable Preset
10.0	10.0 Bar (145 PSI)
15.0	15.0 Bar (218 PSI)

Code	Seals
N	Nitrile

Kit	Part Number
Nitrile Seal	SK30508N-1
Fluorocarbon Seal	SK30508V-1

CV

Check Valves

SH

Shuttle Valves

LM

Load/Motor Controls

FC

Flow Controls

PC

Pressure Controls

LE

Logic Elements

DC

Directional Controls

SV

Solenoid Valves

PV

Proportional Valves

CE

Coils & Electronics

BC

Bodies & Cavities

TD

Technical Data


General Description

Spool Type, Normally Closed, Pilot to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features



- High flow capacity
- Can be used as high flow switching or metering element
- Can be used as bleed off style pressure compensated flow regulator when used with restrictor
- Various switching pressures available
- 1:1 pilot pressure ratio
- Hardened working parts for maximum durability
- All external parts zinc plated

Performance Curve (Through cartridge only) Vented Open Pressure Drop vs. Flow 1 to 2

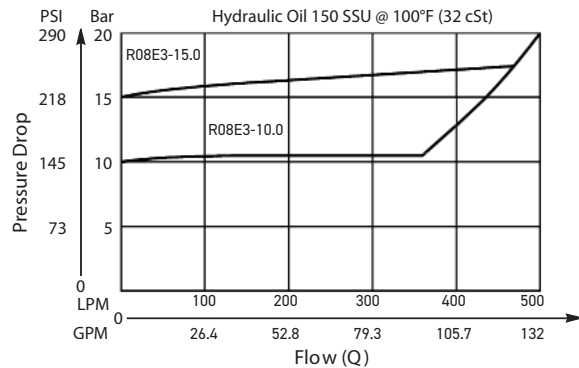


Specifications

Rated Flow	500 LPM (132 GPM)
Nominal Flow @ 7 Bar (100 PSI)	340 LPM (90 GPM)
Maximum Inlet Pressure	420 Bar (6000 PSI)
Leakage at 150 SSU (32 cSt)	82ml/min. @ 240 Bar (3000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.69 kg (1.52 lbs.)
Cavity	C20-3S (See BC Section for more details)

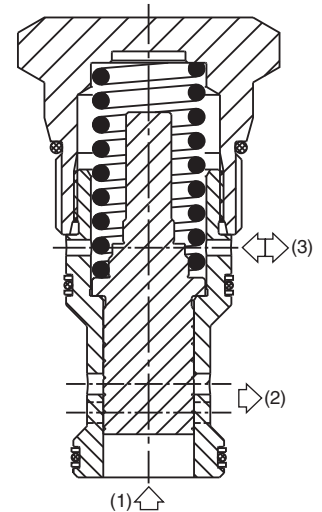

Dimensions

Millimeters (Inches)

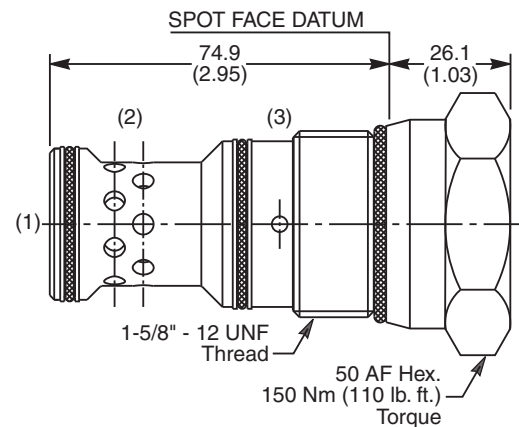

Ordering Information

R08E3		N
20 Size Logic Element	Switching Pressure	Seals

Code	Switching Pressure Non Adjustable Preset
10.0	10.0 Bar (145 PSI)
15.0	15.0 Bar (218 PSI)

Code	Seals
N	Nitrile

Kit	Part Number
Nitrile Seal	SK30512N-1
Fluorocarbon Seal	SK30512V-1

General Description


Spool Type, Normally Closed, Vent to Open Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- High flow capacity
- Used as high flow switching or metering element
- Can be used as main stage for a pilot operated relief or sequence valve
- Integral pilot flow filter
- Various bias spring pressures available
- 1:1 pilot pressure ratio
- Hardened working parts for maximum durability
- All external parts zinc plated
- "D"-Ring eliminates backup rings



Performance Curve

Pressure Drop, vs. Flow (Through cartridge only)
Hydraulic Oil 150 SSU @ 100F (32cSt)

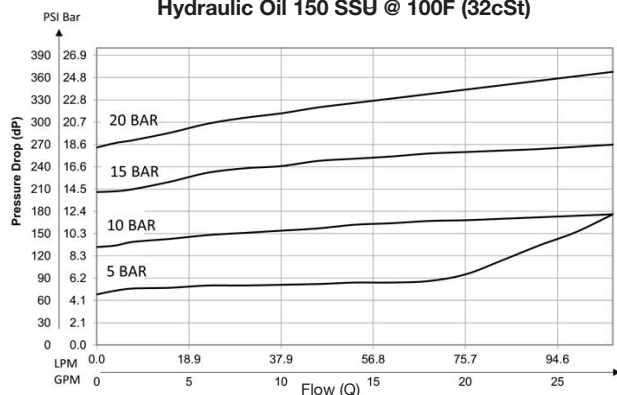


Specifications

Rated Flow	57 LPM (15 GPM)
Maximum Inlet Pressure	350 Bar (5000 PSI)
Leakage @ 150 SSU (32 cst)	82 ml/min.@207 Bar (3000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +93°C ("D"-Ring) (-35°F to +200°F) -34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/ Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	.14 kg (.30 lbs.)
Cavity	C10-3S (See BC Section for more details)

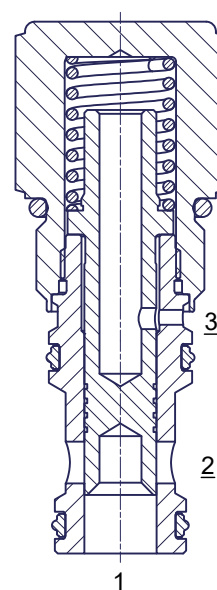

Dimensions

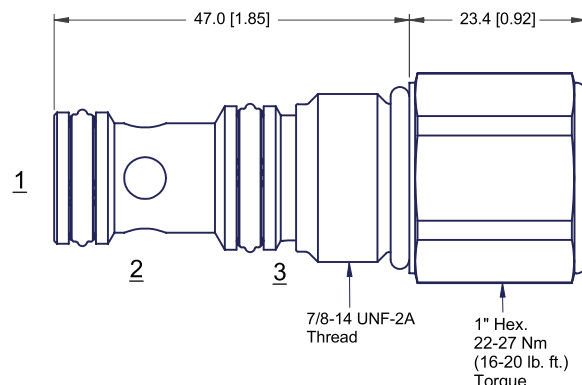

Ordering Information

LE102B

10 Size
Logic Element



Bias
Spring

Highlighted represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.

Code	Bias Spring
01	1.7 Bar (25 PSI)
05	3.5 Bar (50 PSI)
07	6.9 Bar (100 PSI)
10	10.3 Bar (150 PSI)
15	15 Bar (218 PSI)
20	20 Bar (290 PSI)

Code	Seals
Omit	"D-Ring"

Kit	Part Number
D-Ring Seal	SK10-3S
Nitrile Seal	SK10-3S
Fluorocarbon Seal	SK10-3SV

General Description


Spool Type, Normally Open, Vent to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- High flow capacity
- Used as high flow switching or metering element
- Can be used for inline pressure compensated flow control when used with restrictor (refer to application)
- Various bias spring pressures available
- 1:1 pilot pressure ratio
- Hardened working parts for maximum durability
- All external parts zinc plated
- "D"-Ring eliminates backup rings



Performance Curve

Pressure Drop, vs. Flow (Through cartridge only)
Hydraulic Oil 150 SSU @ 100F (32cSt)

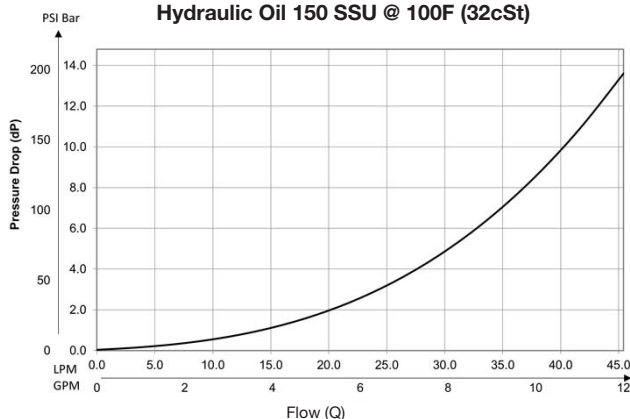


Specifications

Rated Flow	57 LPM (15 GPM)
Maximum Inlet Pressure	350 Bar (5000 PSI)
Leakage at 150 SSU (32 cSt)	82 ml/min. @ 207 Bar (3000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +93°C ("D"-Ring) (-35°F to +200°F) -34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.14 kg (0.3 lbs.)
Cavity	C10-3S (See BC Section for more details)

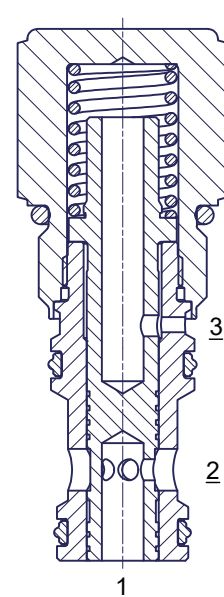

Dimensions

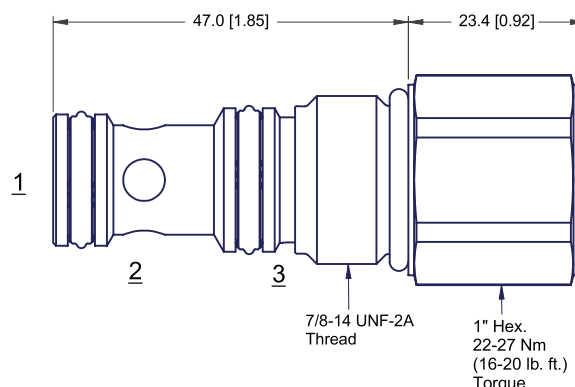

Ordering Information

LE103A

10 Size
Logic Element



Bias
Spring

Highlighted represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.

Code	Bias Spring
01	1.7 Bar (25 PSI)
05	3.5 Bar (50 PSI)
07	6.9 Bar (100 PSI)
10	10.3 Bar (150 PSI)
15	15 Bar (218 PSI)
20	20 Bar (290 PSI)

Code	Seals
Omit	"D-Ring"

Kit	Part Number
D-Ring Seal	SK10-3S
Nitrile Seal	SK10-3S
Fluorocarbon Seal	SK10-3SV

General Description


Spool Type , Normally Open, Vent to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- High flow capacity
- Used as high flow switching or metering element
- Can be used for inline pressure compensated flow control when used with restrictor (refer to application)
- More stable than poppet type
- Range of spring ratings available
- 1:1 pilot ratio
- Hardened working parts for maximum durability
- All external parts zinc plated



Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

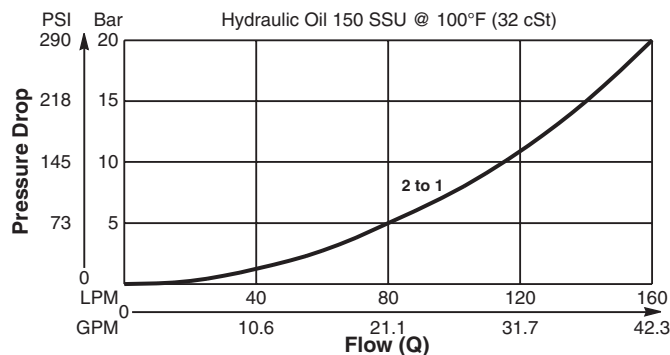


Specifications

Rated Flow	160 LPM (42 GPM)
Nominal Flow @ 7 Bar (100 PSI)	90 LPM (24 GPM)
Maximum Inlet Pressure	420 Bar (6000 PSI)
Leakage at 150 SSU (32 cSt)	125ml/min. @ 100 Bar (1450 PSI)
Switching Pressure	See ordering information
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.37 kg (0.82 lbs.)
Cavity	C16-3S (See BC Section for more details)

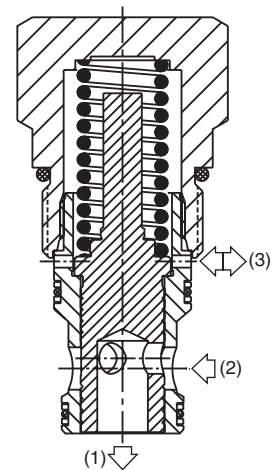

Dimensions

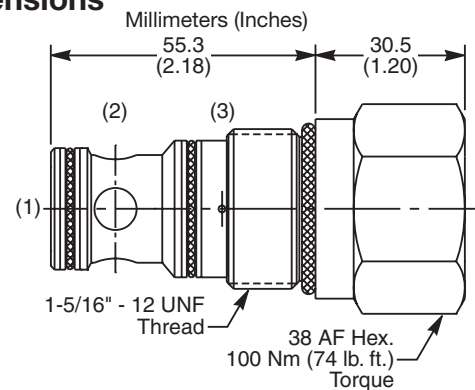

Ordering Information

R06H3		N
16 Size Logic Element	Switching Pressure	Seals

Code	Switching Pressure Non Adjustable Preset
10.0	10.0 Bar (145 PSI)
15.0	15.0 Bar (218 PSI)

Code	Seals
N	Nitrile

Kit	Part Number
Nitrile Seal	SK30508N-1
Fluorocarbon Seal	SK30508V-1

General Description


Spool Type, Normally Open, Vent to Close Logic Element. For additional information see Technical Tips on pages LE2-LE7.

Features

- High flow capacity
- Used as high flow switching or metering element
- Can be used as pressure regulator with mainstage controlled remotely by a pilot relief valve or a proportional valve
- Integral pilot flow filter
- Various bias spring pressures available
- 1:1 pilot pressure ratio
- Hardened working parts for maximum durability
- All external parts zinc plated
- "D"-Ring eliminates backup rings



Performance Curve

Pressure Drop, vs. Flow (Through cartridge only)
Hydraulic Oil 150 SSU @ 100F (32cSt)

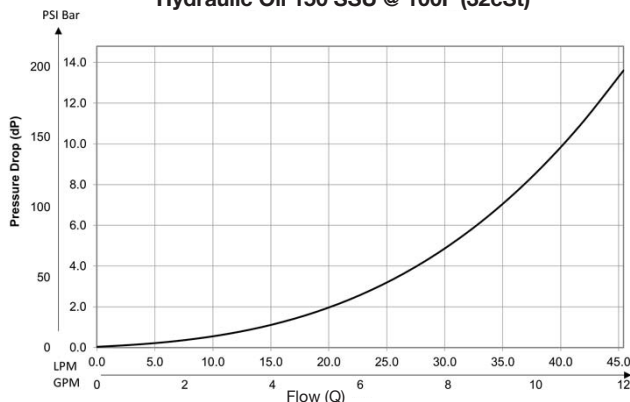


Specifications

Rated Flow	57 LPM (15 GPM)
Maximum Inlet Pressure	350 Bar (5000 PSI)
Leakage at 150 SSU (32 cSt)	82 ml/min.@207 Bar (3000 PSI)
Cartridge Material	All parts steel. All operating parts hardened steel.
Operating Temp. Range/Seals	-37°C to +93°C ("D"-Ring) (-35°F to +200°F) -34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
Fluid Compatibility/Viscosity	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
Filtration	ISO-4406 18/16/13, SAE Class 4
Approx. Weight	0.14 kg (0.3 lbs.)
Cavity	C10-3S (See BC Section for more details)

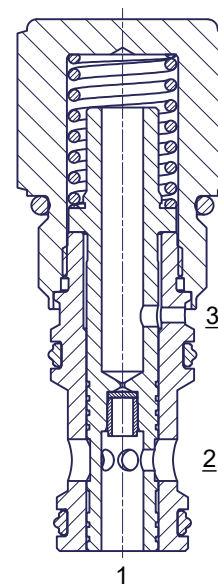

Dimensions

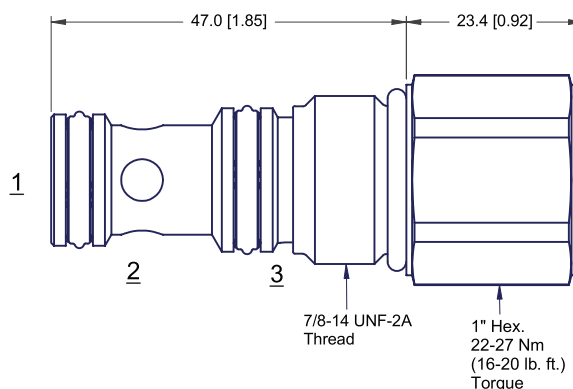

Ordering Information

LE103B

10 Size
Logic Element



Bias
Spring

Highlighted represents preferred options that offer the shortest lead times. Other options may be available, but at extended lead times.

Code	Bias Spring
01	1.7 Bar (25 PSI)
05	3.5 Bar (50 PSI)
07	6.9 Bar (100 PSI)
10	10.3 Bar (150 PSI)
15	15 Bar (218 PSI)
20	20 Bar (290 PSI)

Code	Seals
Omit	"D-Ring"
Kit	
D-Ring Seal	SK10-3S
Nitrile Seal	SK10-3S
Fluorocarbon Seal	SK10-3SV