



HIGH FLOW TETPOR II Filters

- air / gas filters
- expanded PTFE

HIGH FLOW TETPOR II gas sterilization filters have been developed to benefit from technological advances within the manufacture of PTFE membranes. This new generation of filter sets the standard with an unrivalled combination of efficiency, flow rate and strength.

HIGH FLOW TETPOR II is validated to provide sterilizing grade filtration performance against ASTM 838 liquid bacterial challenge methodology.

This ensures the filter will guarantee the sterility of your process in the worst-case scenario where the filter may be subjected to bulk liquid due to a process problem. Subtle changes to the structure of the hydrophobic PTFE have also resulted in the production of an extremely robust product validated for 225 steam sterilization cycles @ 142 °C (287.6 °F). The combination of non-woven supports upstream of the membrane and an expanded net layer downstream has significant benefits, providing increased protection and service life while guaranteeing zero fibre shedding into the process.

HIGH FLOW TETPOR II is suitable for all sterile gas applications including fermentation inlet and off gas streams, venting, lyophilisers, autoclave vacuum breaks and blow-fill-seal equipment.


Features and Benefits

- Optimum pleat configuration
- Steam sterilizable up to 225 cycles at 142 °C (287.6 °F)
- Unrivalled flow rates combined with low pressure drops
- Fully validated to ASTM 838 for liquid bacterial challenge
- Fully validated to aerosol and viral challenge
- Integrity testable by all methods including water intrusion test




Note: TETPOR is a registered trademark of Parker Hannifin Corporation.

Performance Characteristics

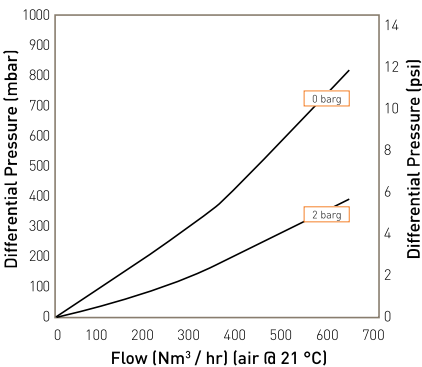

Flow rates for other sizes available upon request

10" Size (250 mm) Cartridge

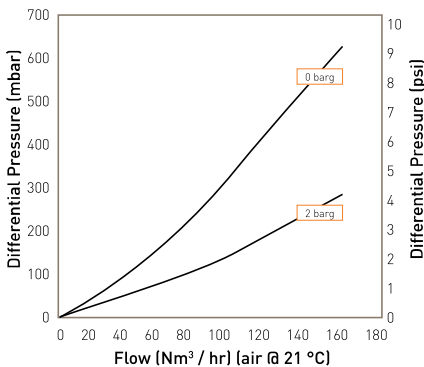

Flow rates for other sizes available upon request

A Size (125 mm) Cartridge

DS P 37 10/17 Rev. 1D